



Morsettiera CP 66


Terminal Block CP 66

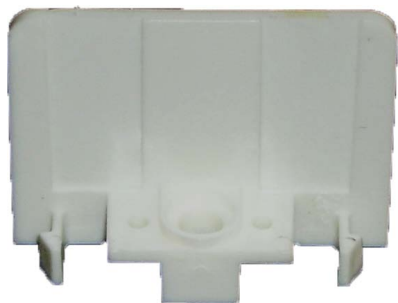

CP 66 - C

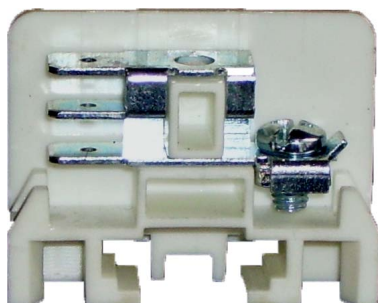

CP 66 - V

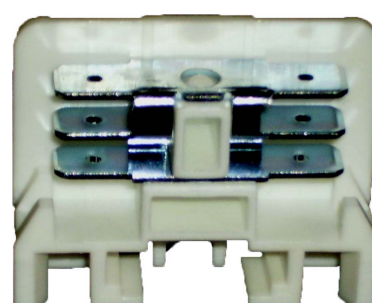

CP 66 - Z

Corpo isolante / Plastic material	POLYAMIDE PA66 UL94 V-0
Faston 6,3 x 0,8 / Tabs 6,3 x 0,8	Acciaio zincato / Zinc plated steel
Passo / Pitch	11 mm.
Larghezza / Width	38 mm.
Altezza / Height	28,8 mm.

CERTIFICAZIONI / APPROVALS

GWT 850°C



IMQ File nr. E8513 (EN 60998-1 / EN 60998-2-1 / EN 61210)

2,5 mm² 450 V 24 A T 110°C



UL – CSA File nr. E143004 (UL 1059) (CSA C22.2 No. 158)

14 AWG 600 V 15 A T 110°C

Tipo di connessione:

- morsetto a vite: un conduttore rigido da 2,5 mm²
- terminazione a linguetta: tre conduttori flessibili da minimo 1 mm² per ciascun polo (un conduttore per ciascuna linguetta)

Type of connection:

- screw terminal: one rigid conductor of 2,5 mm²
- male tabs terminations: three flexibles conductors of 1 mm² minimum for each pole (one conductor for each male tab)



B.Components S.R.L.



CERT. N. 9170.BCOM