



Morsettiera PG 10

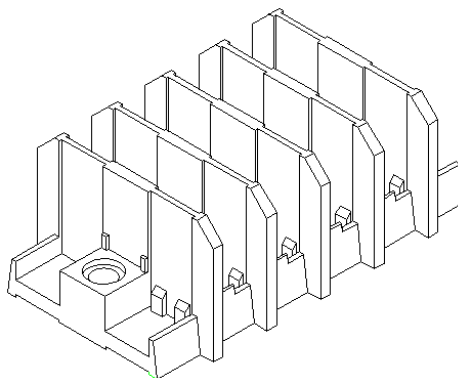

Terminal Block PG 10

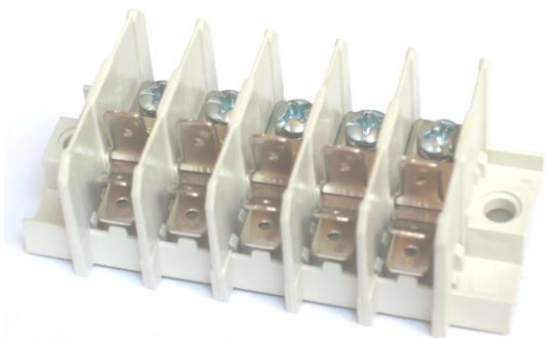

Corpo isolante / Plastic material	POLYAMIDE PA66 UL94 V-0
Numero poli / Number of poles	1 – 18
Passo / Pitch	11 mm
Larghezza / Width	37,2 mm
Altezza / Height	24 mm
Foro fissaggio / Fixing hole	Ø 4 mm
Grado protezione / Degree of protection (IP)	IP 00

CERTIFICAZIONI / APPROVALS

GWT 850°C - GWT 750°C (No flame) EN 60335.1

	IMQ File nr. E8513 (EN 60998-1 / EN 60998-2-1 / EN 61210)			
	2,5 mm ²	450 V	24 A	T 85°C
	UL – CSA File nr. E143004 (UL 1059) (CSA C22.2 No. 158)			
	14 AWG	600 V	15 A	T 130°C

Prodotti conformi ai requisiti essenziali della Direttiva B.T. 2006/95/CE

Products meeting the essential requirements of L.V.D. 2006/95/EC



B.Components S.R.L.



CERT. N. 9170.BCOM